

General

| | |
|------------------|------------------|
| Product Type: | Downlight |
| Mounting Type: | Ceiling Recessed |
| Driver Required: | Yes |
| Application: | Indoor |

Lighting

| | |
|------------------|-------------------|
| Light Source: | Citizen COB LED |
| Wattage: | 20W |
| Lumen: | 1800lm @4000K |
| Efficacy (lm/W): | 90lm/W |
| Beam Angle: | 15°/24°/36°/60° |
| Colour Temp (K): | 2700K/3000K/4000K |
| CRI (Ra): | 90 |
| UGR: | <12 |
| Macadam Ellipse: | <2 SDCM |
| Lifetime (hrs): | 50000 hrs |

Electrical



| | |
|-----------------|-----------------------------------|
| Input: | 220-240, 50/60Hz |
| Driver Type: | Remote |
| Dimmable: | On/Off (Dimming option available) |
| Dimming Method: | - |

Physical

| | |
|----------------|-------------|
| Housing: | Aluminum |
| Diffuser: | PC lens |
| Finish: | White/Black |
| Dimension: | Ø138xH86mm |
| Cut out: | Ø115mm |
| IP Rating: | IP20 |
| IK Rating: | - |
| Adjustability: | Yes |
| Gross Weight: | - |

Additional Information

| | |
|-----------|---------|
| Warranty: | 5 Years |
|-----------|---------|

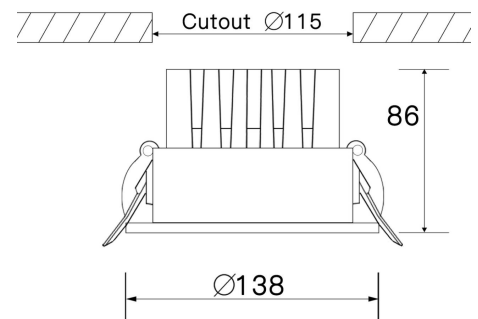

Microlights® reserves the right to modify technical specifications and data without notice. Rated values (at 25°C) for luminous flux and electrical load have an initial tolerance of +/- 10%, CCT tolerance ranges from +/- 150K. For product inquiries, please contact us at info@microlightsgroup.ae

©2024 Microlights Lighting LLC. All rights reserved.