

NEONSTRIP 1616F



General

Product Type:	LED Neon Strip
Mounting Type:	Surface Mounted
Driver Required:	Yes
Application:	Indoor/Outdoor

Lighting

Light Source:	LED SMD
Wattage:	12W/m
Lumen:	995lm/m @4000K
Efficacy (lm/w):	83m/W
Beam Angle	120°
Colour Temp (K):	2700K/3000K/4000K
CRI (Ra):	90
LED Qty:	480 LED/m
Macadam Ellipse:	<2 SDCM
Lifetime (hrs):	50000 hrs

Electrical




Input:	24Vdc
Driver Type:	Remote
Dimmable:	No (Optional)
Power Feed:	One-end feed (Front cable entry)
Cable Out:	-

Physical

Material:	Silicon
Finish:	White
Dimension:	W16xH16mm
Min. Cutting Length:	50 mm
Max. Length:	5 m
IP Rating:	IP65
IK Rating:	-
Adjustability:	No
Gross Weight:	-

Additonal Information

Warranty:	3 Years
Accessories:	24Vdc drivers and mounting accessories to be ordered separately

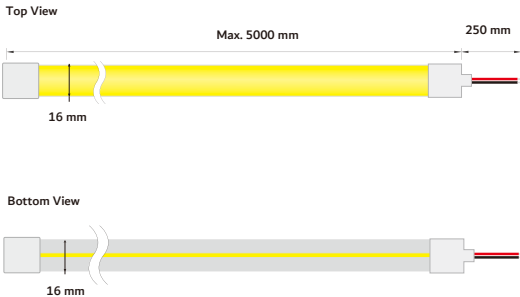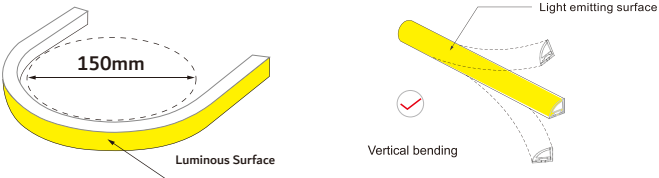

Microlights® reserves the right to modify technical specifications and data without notice. Rated values (at 25°C) for luminous flux and electrical load have an initial tolerance of +/- 10%, CCT tolerance ranges from +/- 150K.
For product inquiries, please contact us at info@microlightsgroup.ae

©2024 Microlights Lighting LLC. All rights reserved.