


NEONSTRIP 3D1615




General

Product Type:	Neonstrip
Mounting Type:	Surface Mounted
Driver Required:	Yes
Application:	Indoor/Outdoor

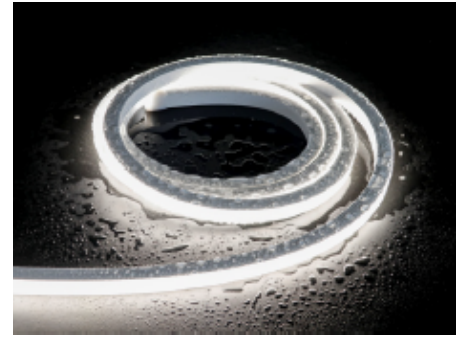



Lighting

Light Source:	LED SMD
Wattage:	10W/m
Lumen:	800lm/m (@4000K)
Efficacy (lm/W):	80lm/W
Beam Angle:	120°
Colour Temp (K):	2700K/3000K/4000K
CRI(Ra):	90
LED Qty:	120LED/m
Macadam Ellipse:	<2 SDCM
Lifetime (hrs):	50000 hrs

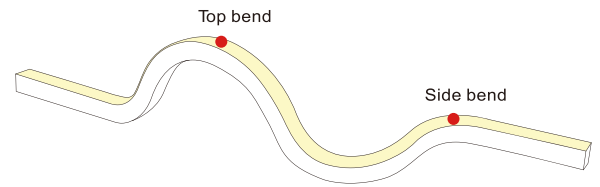

Electrical


Input:	24Vdc
Driver Type:	Remote
Dimmable:	No (Optional)
Power Feed:	One/two end feed
Cable Out:	Front/side/bottom




Physical

Material:	Food-grade silicon
Finish:	White
Dimension:	W16xH15mm
Min. Cutting Length:	50 mm
Max. Length:	5000 mm
IP Rating:	IP67
IK Rating:	IK08
Adjustability:	No
Gross Weight:	-


Top view



Side view



Bottom view



Additional Information

Warranty:	5 Years
Accessories:	24Vdc drivers and mounting accessories to be ordered separately

Microlights® reserves the right to modify technical specifications and data without notice. Rated values (at 25°C) for luminous flux and electrical load have an initial tolerance of +/- 10%, CCT tolerance ranges from +/- 150K. For product inquiries, please contact us at info@microlightsgroup.ae

©2024 Microlights Lighting LLC. All rights reserved.